

# 2DC Filter Cartridge

0.5 Micron Precoat Filtration for premium quality water, PLUS AgION® Antimicrobial protection



## APPLICATIONS

Drinking water

Water coolers

## BENEFITS

Micro-Pure II media with AgION™ antimicrobial protection inhibits potential bacterial growth

Provides clear, fresh, premium quality ingredient water for great tasting cold beverages

Everpure's unique filter blend using activated carbon reduces chlorine taste and odor and other offensive contaminants

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size

Reduces health contaminants such as asbestos fibers and Cryptosporidium and Giardia cysts

Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination

## OPERATIONAL TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when capacity is reached or when pressure falls below 10 psi

Service flow rate must not exceed 0.5 gpm

Always flush the filter cartridge at time of installation and cartridge change

Everpure water treatment systems are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



2DC Replacement Cartridge: EV9591-06

## SPECIFICATIONS

<b>Overall Dimensions:</b>	10.25" H x 3.25" diameter
<b>Service Flow Rate:</b>	0.5 gpm (1.9 Lpm)
<b>Rated Capacity:</b>	750 gallons (2839L)
<b>Pressure Requirements</b>	10-125 PSI (0.7 – 8.6 bar)
<b>Maximum Temperature:</b>	35 -100°F (2- 38°C)
<b>Electrical Power Supply:</b>	None required

# 2DC Filter Cartridge

## EV9591-06

### INSTALLATION TIPS

Never use saddle valve for connection

Use 3/8" water line


Install vertically with cartridge hanging down

Allow 2 1/2" clearance below the cartridge for easy cartridge replacement

Flush 2DC cartridge by running water through filter for three minutes at full flow

This system must be installed and maintained according to the manufacturer's instructions, including installation and replacement of filter cartridges

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

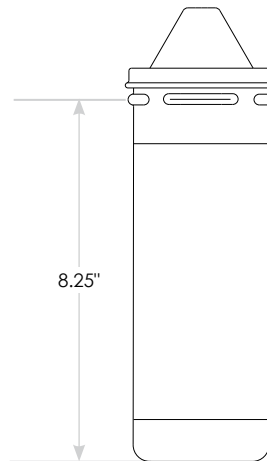

For Technical Assistance, please  
email: [servicespecialist@pentair.com](mailto:servicespecialist@pentair.com)  
or call: 800-942-1153

Everpure reserves the right to update specifications,  
change prices, or make substitutions without notice.



System Tested and Certified  
by NSF International against  
NSF/ANSI Standards 42 and  
53 for the reduction of:

Standard No. 42 –  
Aesthetic Effects  
*Chemical Reduction*  
Taste and Odor  
Chlorine  
*Mechanical Filtration*  
Particulate Class I

Standard No. 53 –  
Health Effects  
*Mechanical Filtration*  
Cyst  
Asbestos

EV9591-06 2DC DE11



# Liberty

## Ersatzteile & Zubehör

Liberty Vertriebs GmbH  
Bonner Straße 103  
40589 Düsseldorf

Tel.: 0211-753520  
Fax.: 0211-753575

Internet: [www.libertyshop.de](http://www.libertyshop.de)  
Email: [verkauf@libertyshop.de](mailto:verkauf@libertyshop.de)